



## Indoor Multi Band Omni Antenna

### Salient Features

- Designed to obtain maximum gain
- Frequency: 800MHz to 2200MHz
- Made with waterproof and corrosion resistant material
- Fixed mounting kit Included
- Connectorization as per requirement

### Applications

- In-Building System
- 802.11b/g Application
- WiFi / WLAN Application



**Bulb Omni Antenna**

### Technical Specifications


Part no.	JAS-OMNI-800~2200-3N(F)
Frequency Range	800MHz -2200MHz
Bands	CDMA,GSM,DCS,UMTS
Gain	3dBi
Type	Ceiling Omni
VSWR	≤1.3:1
Polarization	Vertical
Power Handling	100 Watt
Horizontal Beam Width	360° Deg.
Vertical Beam Width	55° Deg
Impedance	50 Ω
Connector	N-Female
Dimension (L x H)	165 mmDia X 140mm
Weight	350 gms approx

\*PHDCOMM company policy is one of continuing improvement, therefore we reserve the right to change the specifications without the prior notice.

### Ordering Information Table

Part No.	Description
JAS-OMNI-800/2200-3N (F)	Indoor Multi Band Omni Antenna, Ceiling mount, 3 dBi, Pigtail with N-Female connector.

### RADIATION PATTERN

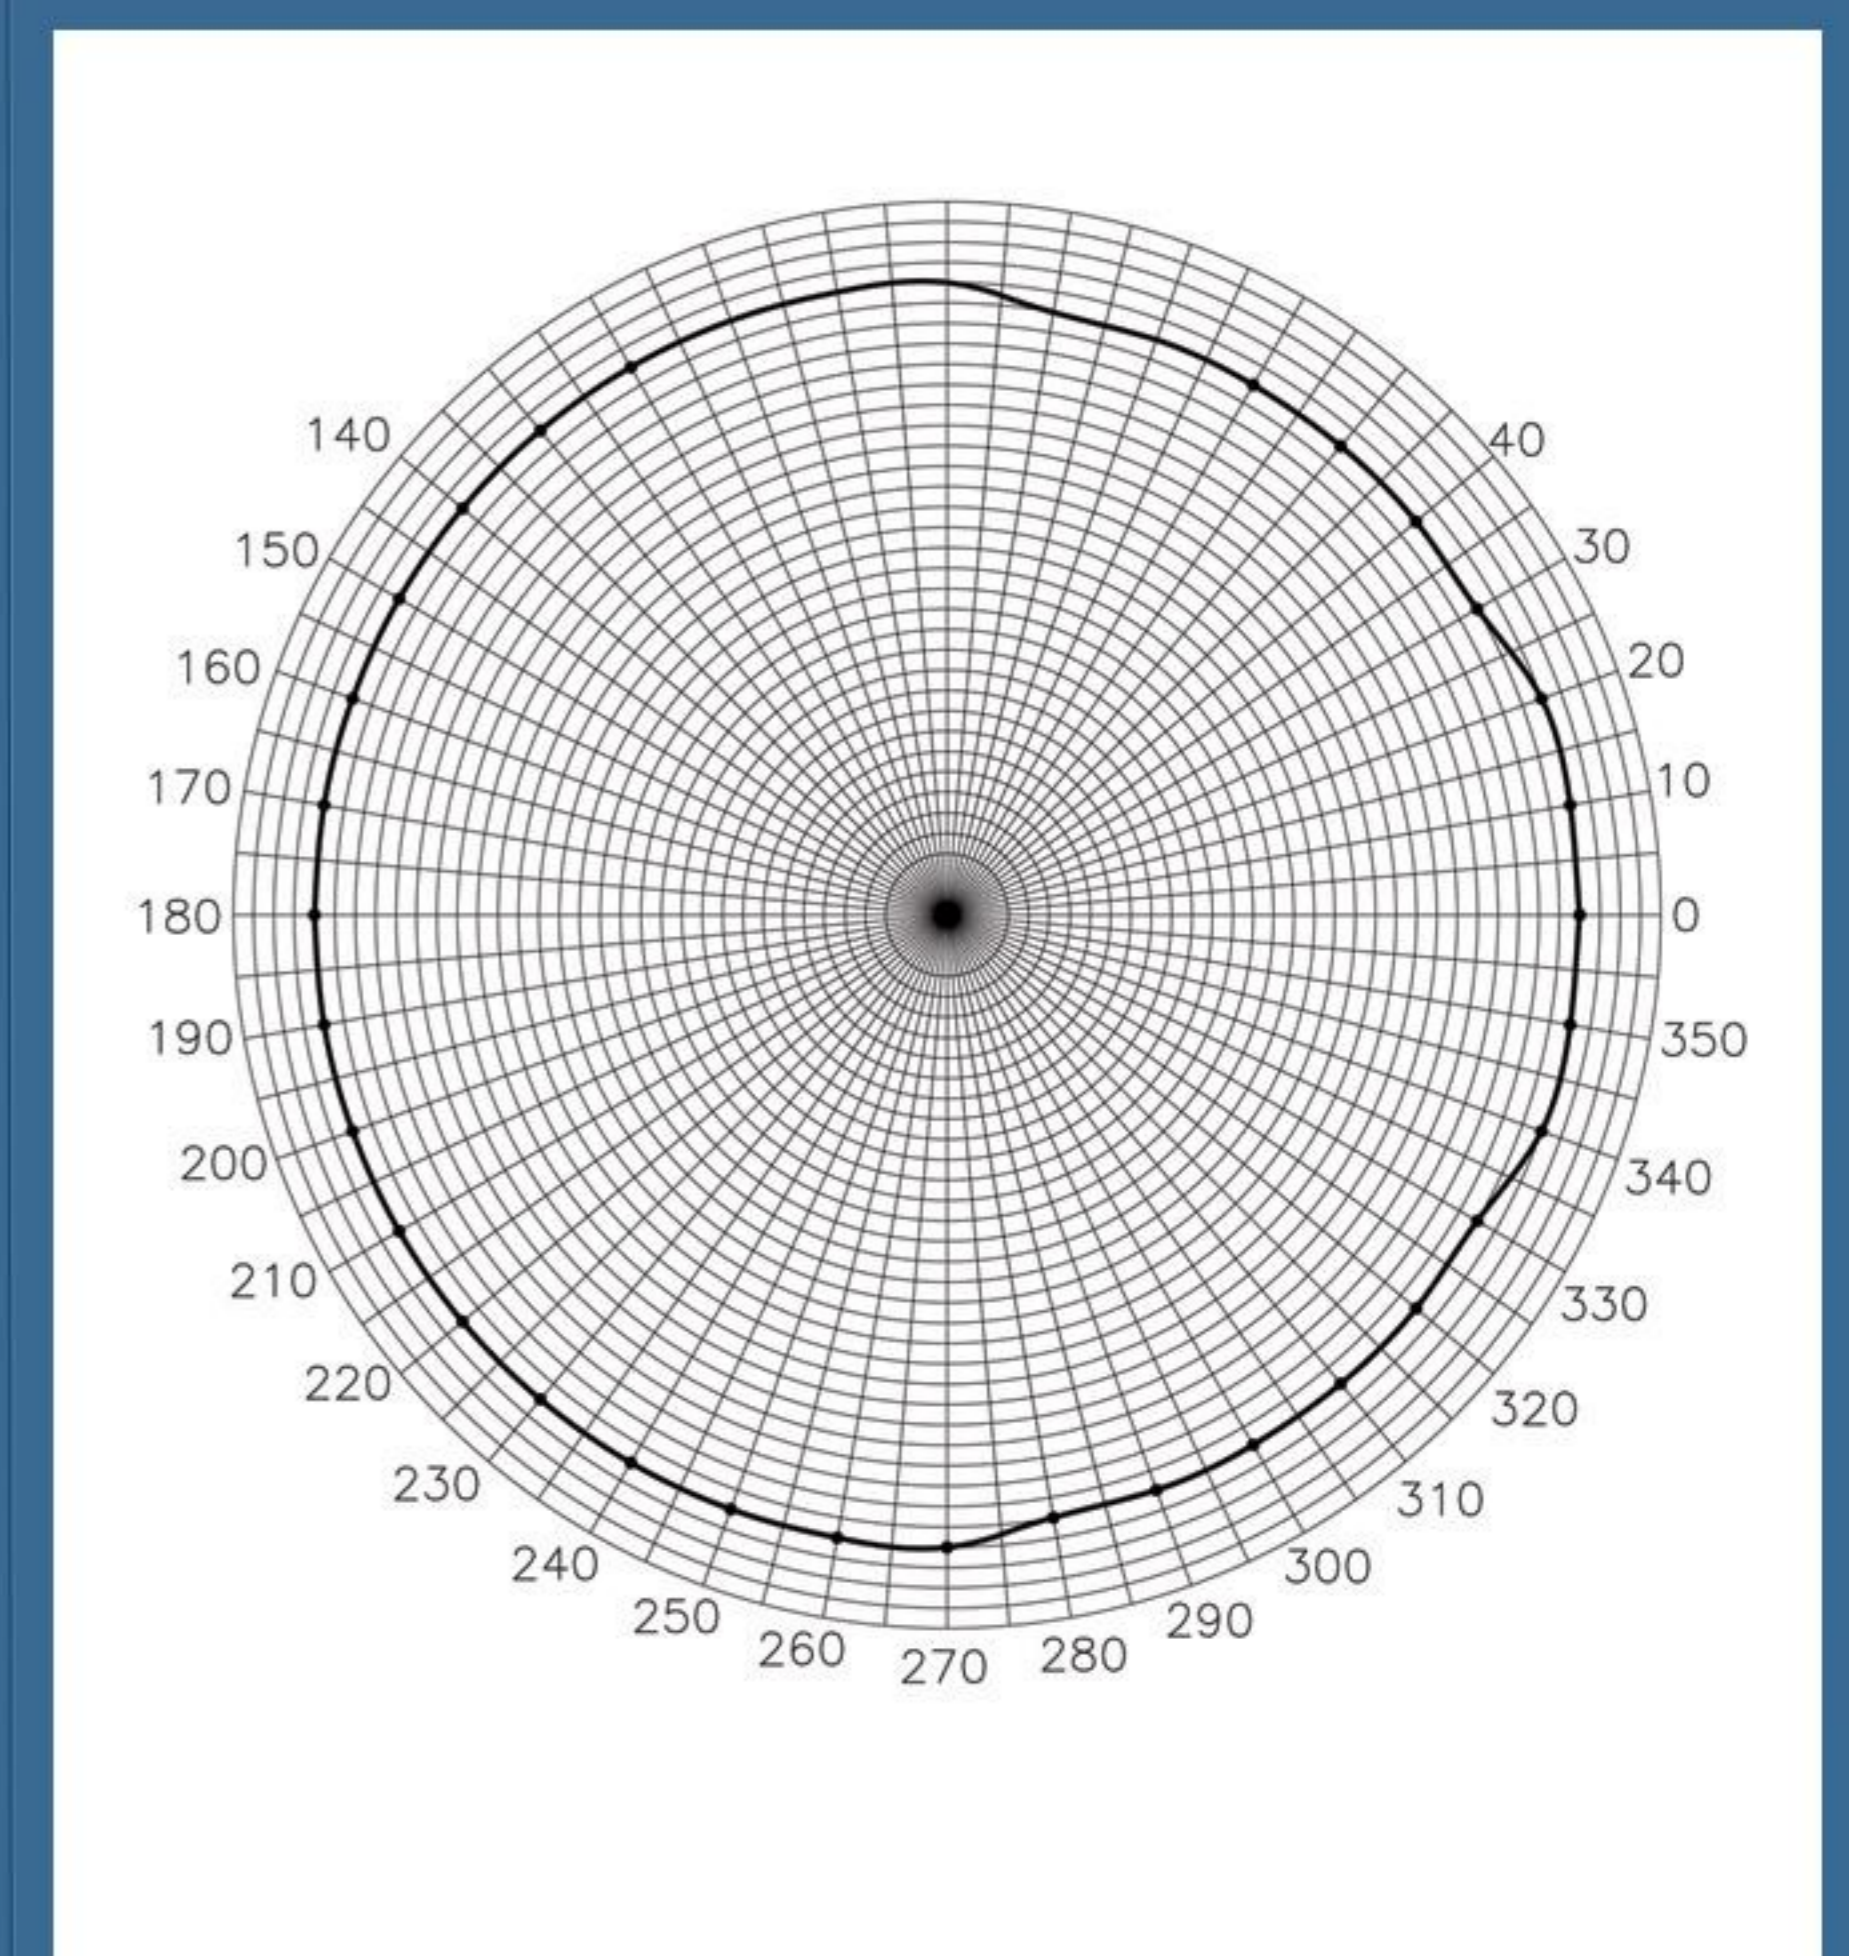

SCALE:1 dBi / DIV

**For Sales Enquiry please contact:**

**PHDCOMM Private Limited**

**Corporate.Office** : 610/611, Srishti Plaza, Saki Vihar Road, Powai, Andheri-East, Mumbai-400072,

Tel: +91 22 28573050/53, Fax No:+91 22 28573051, Email: sales@phdcomm.com,Website: www.phdcomm.com